


# BERN, PC CLEAR (FRACTURE PROOF), DIRECT/INDIRECT

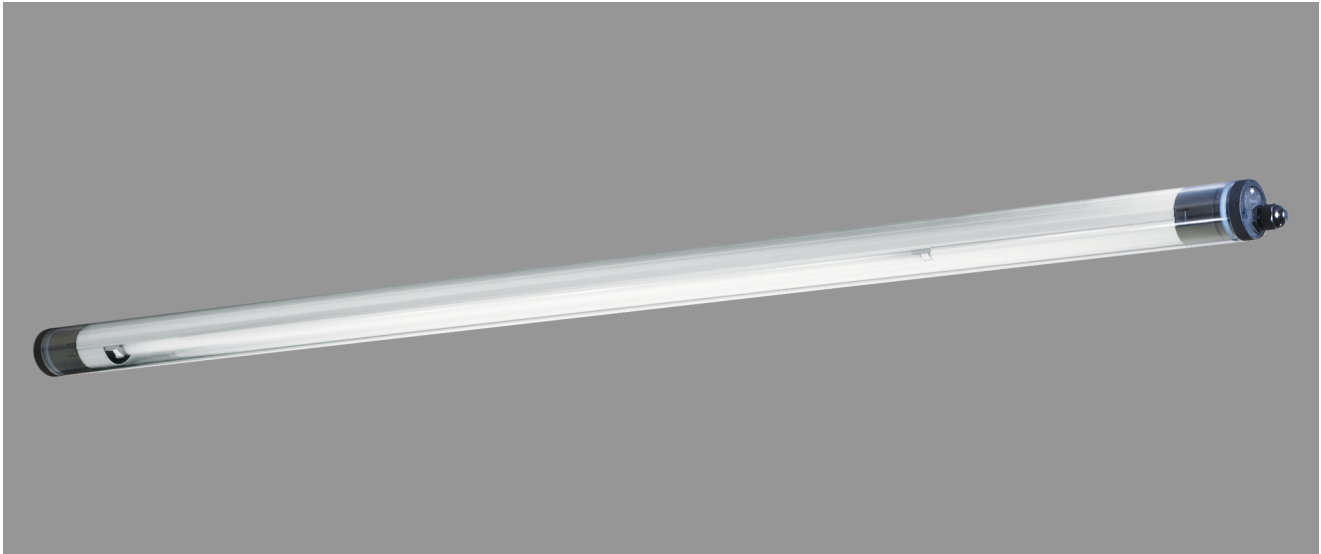

BERN Tubular luminaire Ø 60 mm, PC clear (fracture proof), direct/indirect beam, ECG; T8/58W

Tubular luminaire, resistant to pressurised water, made of PC clear (fracture proof)  
anodised internal aluminium reflector, direct/indirect beam.



End caps with quick-release fasteners flush with polymer tube.

Built-in electronic ballast. For lamps T8 58W.

IP 68, 20 m, protection class II.

Mounting with polymer and stainless steel mounting clamps.

Article number: 534 67 - 534 004

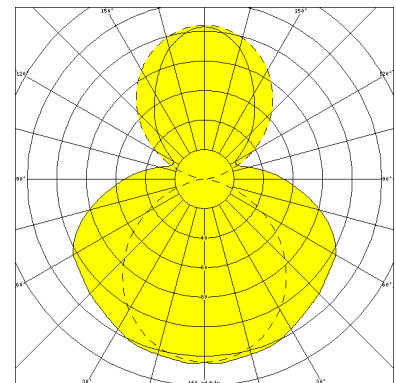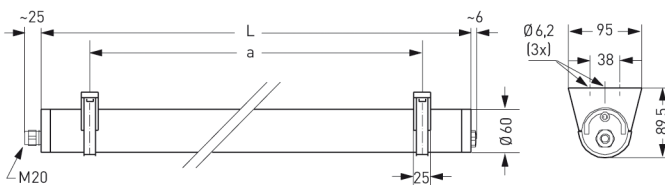

## MASSE

Länge (mm)	Breite (mm)	Höhe (mm)	a-Mass (mm)
2005	60	60	1570

## LIGHT OUTPUT RATIO

LOR (%)
73.73