




# COBURG II 1H, REFLECTOR TUBE NARROW BEAM PC CLEAR



COBURG II 1h with narrow beam reflector PC clear (fracture-proof), electronic ballast; T5/28W (emerg. 40%)

Single battery operated luminaire made of glass fibre reinforced polyester. IP 65, protection class II.  
 With narrow beam reflector tube PC clear (fracture-proof), with internal aluminium reflector.  
 Emergency operation by electronic emergency lighting unit including charging, control display, mains monitoring and protection against total discharge. Emergency operation 1h, 40% luminous flux.  
 Mains operation by electronic ballast. With automatic self-test.  
 2 stainless steel mounting clips for variable fixing centres.

Article number: 803 070 01 - 516 991

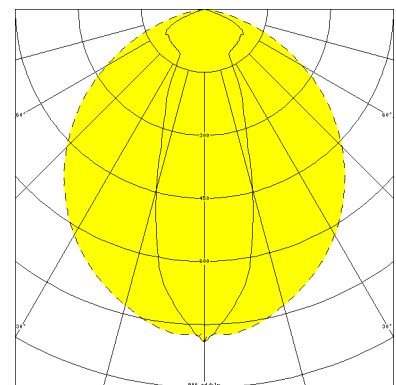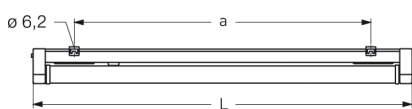

MASSE			
Länge (mm)	Breite (mm)	Höhe (mm)	a-Mass (mm)
1200	130	138	930

LIGHT OUTPUT RATIO
LOR (%)
91.83