


NEW YORK, DIRECT / 28MM

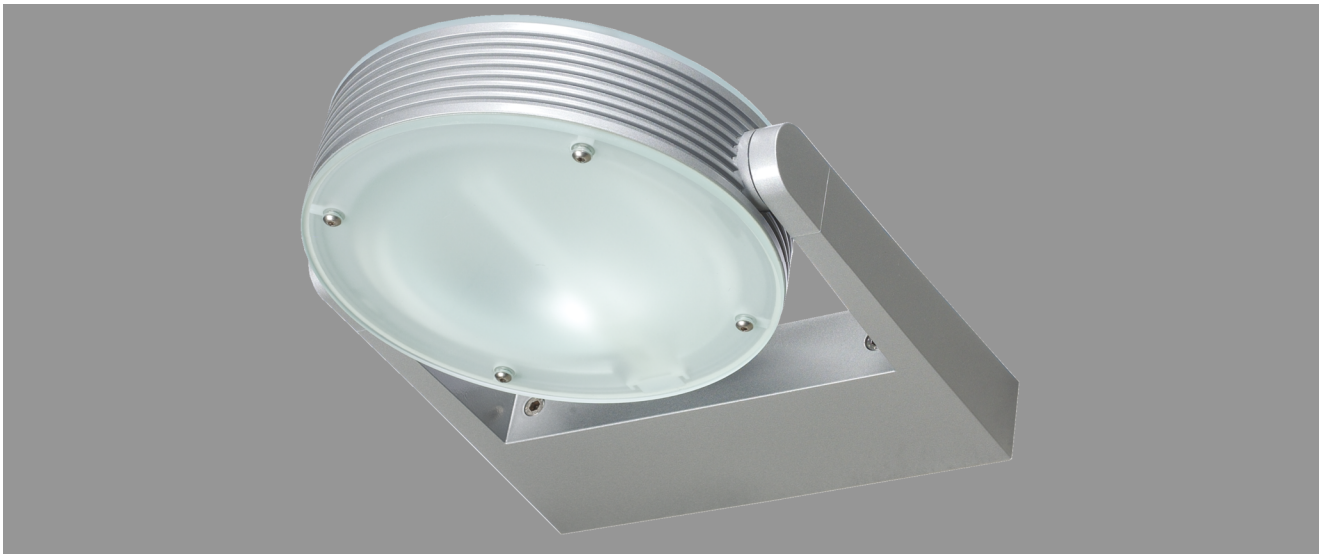

NEW YORK, direct / 28mm

Aluminium multi purpose luminaire

IP 54, protection class II

Aluminium housing, Ø 245 mm, in silver colour finish (RAL 9006), with frameless and satined cover glasses.



Four stainless steel allen screws per side. Continuously adjustable 90° and lockable.

Luminaire in version direct with 28mm slot for uplighting. For metal halide lamps 20W, with "functional earthing".

Wall bracket made of thermoplastic resin, fibre-glass reinforced, with ballast compartment for electronic ballast and connecting terminal.

Mounting via two M8 screws.

Article number: 301 320

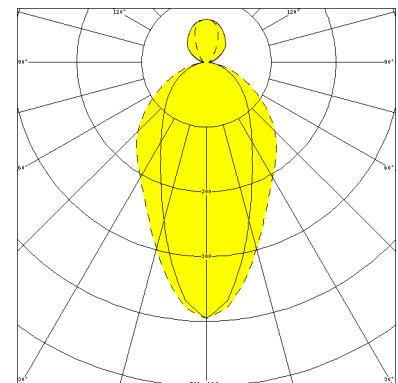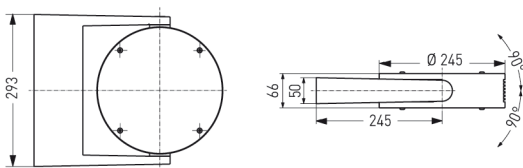

MASSE

Länge (mm)	Breite (mm)	Höhe (mm)	a-Mass (mm)
293	367	66	255

LIGHT OUTPUT RATIO

LOR (%)
69.52