

POLLUX, ASYMETRICAL BEAM (LATERAL)



POLLUX, asymmetric beam (at right angles), inductive; HST 250W

Solid die-cast aluminium housing with satined surface.

Frameless hinged safety glass cover.

Internal aluminium reflector asymmetric beam (at right angles).



For lamps HST 250W. IP 65, protection class I.

Ballast with thermal switch and ignitor with automatic shutoff integrated.

Two cable glands M20.

Only available with swivel bracket 982 107.

Article number: 985 713

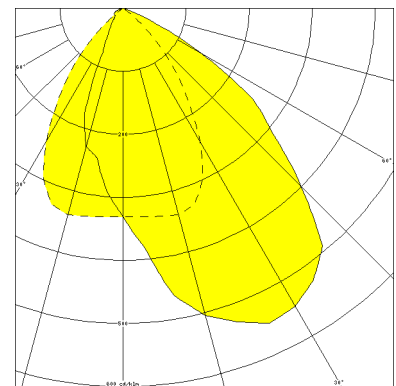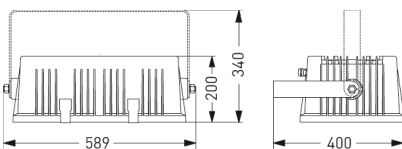

MASSE

Länge (mm)	Breite (mm)	Höhe (mm)	a-Mass (mm)
528	318	200	430

LIGHT OUTPUT RATIO

LOR (%)
64.97